

# Web Software for Design of Snapback Genotyping Assays

Alexa Barnes <sup>1</sup>; Zachary Dwight <sup>2</sup>; Carl Wittwer, MD, PhD <sup>1</sup>; Adam Millington <sup>1</sup>

<sup>1</sup>Department of Pathology, <sup>2</sup>School of Computing, University of Utah, Salt Lake City, UT


## Introduction

DNA hairpins are useful tools in molecular diagnostics. PCR products amplified with a snapback primer show both hairpin melting at lower temperatures and full-length amplification melting at higher temperatures. The  $T_m$  of the hairpin duplex depends on the sequence of the target, thereby allowing genotyping. Snapback primer genotyping with saturating dyes provides the specificity of a probe using only 2 standard primers in a closed-tube system. Special covalent modifications of the primers are not required.<sup>1</sup>

## Materials and Methods


Keeping the targeted base in the middle, different hairpin duplexes were constructed by sequentially adding bases to each end of the duplex. Additional criteria for hairpins included confirming a mismatched pair just inside the loop and incorporating 3'- mismatches to prevent extension (see Results). Melting temperatures ( $T_m$ s) were obtained from nearest neighbor thermodynamic parameters and the loop size. The hairpin with the  $T_m$  closest to the user specification was then selected.

### Probe Design Flowchart

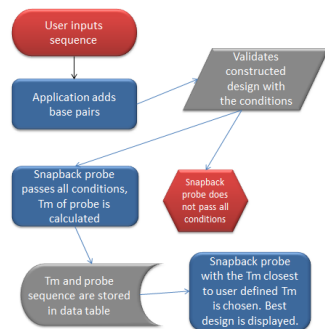

The screenshot shows the uSnapBack web application interface. At the top, the 'uSnapBack' logo is displayed. Below it, the 'Amplicon Sequence' is entered as 'acGTTCTTTGCAgAACTGGCTGGGGCTGTCCACACTGAACCCAGACACTTCTCACTAGTGTCCCTCTGAGGCCAGCCAG TTCTGCAAAAGGACCCACATCAGCCAGTCCACACAGCCAGGCGAGTTCTGAGCT'. The 'Desired Tm' is set to 60. A 'Design' button is visible. The 'Properties' section shows a hairpin structure with a loop size of 93 and a stem size of 14. The calculated  $T_m$  is 64.9°C. The hairpin sequence is shown as 5' GGTCAAgACGTTTC and 3' CCAGTTcTGCAAAG ~GACCC... with a complement sequence GGTCAAgACGTTTC ~CTGGG. The 'Snapback Tail (Probe Element)' is GCTTTGCAgAACTGG. The University of Utah logo and a disclaimer are also present.

Figure 1: uSnapback screenshot of user interface found at: [dna.utah.edu/usb/snap.php](http://dna.utah.edu/usb/snap.php)

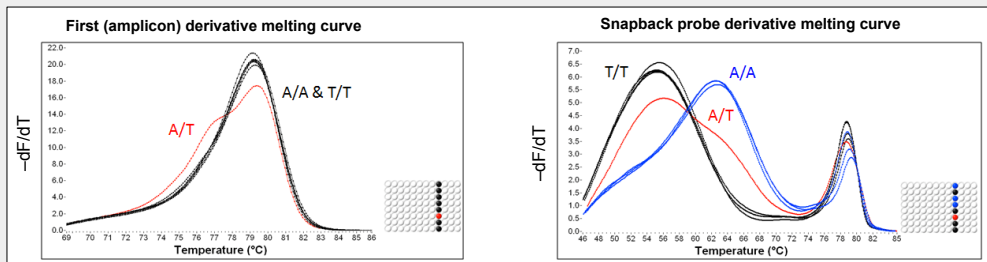

## Conclusion

Using simple criteria to check loop size and by adding 3'-mismatches to prevent extension, optimal snapback probe elements can be designed for the user based on preferred  $T_m$  and snapback thermodynamics. This prediction model is compiled in Flex and is freely available as the user web application, uSnapback (<http://www.dna.utah.edu/usb/snap.php>).



## Results

The following criteria allow the online tool to provide an optimal design for snapback primer genotyping.

### Criteria

- **Loop inspection:** Loop inspection checks the loop length by looking for possible complementarity continuing into the loop region.
- **Extension Prevention:** To best prevent snapback probe extension from an extendable 3'-end, the most debilitating mismatch is incorporated (A-G, C-C, and G-A) when the next base on the template is an A, C or G.
- **Avoidance of T Mismatches.** When the next base on the template is a T, it is difficult to prevent 3'-end extension. Therefore, such duplexes are not considered.

## Acknowledgements

We would like to thank Jana Kent, PhD for her contributions through data and expertise.

## Contact Information

ALEXA.BARNES@PATH.UTAH.EDU

## Citation

<sup>1</sup>Zhou, L. Errigo R.J. Lu H. Poritz M.A. Seipp M.T. Wittwer C.T. Snapback Primer Genotyping with Saturating DNA Dye and Melting Analysis. *Clinical Chemistry*, (2008) 1648-56.